

# SECURE & ROBUST

Benefit from night and day long-range surveillance



**30**  
Up to 30 km  
communication  
range (250m AGL)

**1000**  
m IR detection  
distance

**135**  
Up to 135 min  
endurance

**8**  
min  
deployment  
time

Expert Line

# DT26X Surveillance

LONG-RANGE SMALL UAV,  
SURVEY AND MAP WITH EASE

## INDUSTRIES



Power & Utilities



Oil & Gas



Security & Defense



Railways & Roads



Mines and Quarries

## KEY APPLICATIONS

- Intelligence, Surveillance & Reconnaissance (ISR)
- Discreet Surveillance
- Missions in Sensitive Areas
- Day & Night Routine
- Surveillance of Industrial Sites
- Emergency Response
- Wild Fire Management
- Natural Disaster Management
- Anti-poaching Operations

## KEY DIFFERENTIATORS

**Unrivalled image quality** with on-board stabilization, video tracking, movement detection, human recognition at a distance of more than 1.5 km, both night & day. Real-time video transmitted at a 30 km range.

**Safety:** advanced automatic failsafe modes, with emergency parachute. Safety analysis conducted according to Aeronautical Standards, namely ARP4761.

**Rugged:** field-proven in the harshest conditions (desert, rocks, mountain, tropical forest, snow, etc.), capable of landing on any type of surface, with robust protection for the payload.

**Stealth & mobile:** the DT26X is silent (undetected at night) and can be deployed in the field within minutes by a single operator.


## UAV SPECIFICATIONS

Endurance <sup>1</sup>	Up to 135 minutes
Weight (payload included)	15 kg
Wingspan / Length	3.3 m / 1.6 m
Material	Composite (fiberglass, carbon, kevlar), EPP foam
Deployment time <sup>1</sup>	8 min
Take-off / Landing	Catapult / Belly (all terrain)
Cruise speed	57 km/h (31 kts)
Communication range <sup>1</sup>	Up to 30 km (250m AGL)
Very low cruise acoustic signature	< 80 dBA (acoustic pressure converted at a distance of 1 m)
ITAR FREE	

<b>Detection / Recognition / Identification (field measurement)</b> <sup>1</sup>	EO Human: 1800 m / 1250 m / 1000 m
	EO Vehicule: 8500 m / 4500 m / 3600 m
	IR Human: 1000 m / 500 m / 300 m
	IR Vehicule: 1800 m / 1000 m / 500 m

### Operating conditions

Wind resistance - Weather	50 km/h, moderate rain, -15 to 50°C (at sea level)
Take-off & landing altitude / ceiling <sup>1</sup>	0 to 2300 m ASL @ 0° / 3000 m
Landing accuracy	Typically: 10 m x 20 m / Recommended: 15 m x 30 m

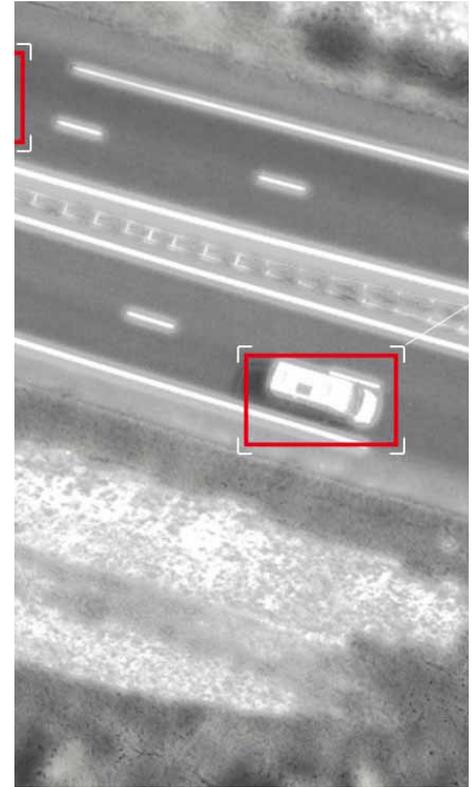

## SENSOR

### Gyrostabilized EO/IR video camera

Pan - Tilt / Angular resolution	Infinite range / 25 µRad
EO specifications	Zoom: x 36 optical / FOV: 1.7 to 56° / Resolution: 720 x 576 px
IR specifications	Zoom: Digital (continuous) / FOV: 17.7° / Resolution: 640 x 480 px / Wavelength: 8 to 14 µm
Tracking	Videotracking, geotracking, «click and track» feature

Advanced image stabilisation  
Onboard image enhancement (contrast, shutter, gain)  
Detection of multiple moving objects

<sup>1</sup> Actual results may vary depending on UAV configuration, battery age and condition, and operational, environmental and climate conditions.

October 2017 version A.

Specifications subject to change without notice to improve reliability, function or design or otherwise.

© 2017, Delair-Tech SAS. All rights reserved. Delair is a trademark of Delair-Tech SAS, registered in France. All other trademarks are the property of their respective owners.

## DELIVERABLES

**REAL TIME VIDEO AND SCREENSHOT FEATURE.**

### ANALYTICS

**ON-LINE FEATURES: POSSIBILITY TO STORE OR REPLAY THE WHOLE FLIGHT**



DELAIR AUTHORIZED DISTRIBUTION PARTNER